

PRICOM C-6100U


EXTERNAL MINI PRINT SERVER

One of the key drivers behind our market leadership position is our interdependent partnerships with the industry's leading printer manufacturers.

Introducing the PRICOM™ C-6100U USB Print Server, the result of our long-term partnership with Canon and our extensive experience in the technology marketplace. Designed exclusively to help users better manage their Canon Bubble Jet printers with USB ports, the PRICOM C-6100U Print Server is ideal for today's digital office because it easily adapts to a variety of environments, from small home-based businesses to larger, enterprise environments.

A COMMITMENT TO COMPATIBILITY, RELIABILITY, EXCELLENCE

The PRICOM C-6100U Print Server offers reliable "plug and print" support for 10Base-T and 10Base-T/100Base TX network printing. In fact, the PRICOM C-6100U bridges bi-directional communications, over the network in a Windows environment, with a wide range of Canon printer models with a USB interface. In addition, with the PRICOM C-6100U Internet Printing Protocol (IPP) support, users can print to an accessible printer via the Internet.

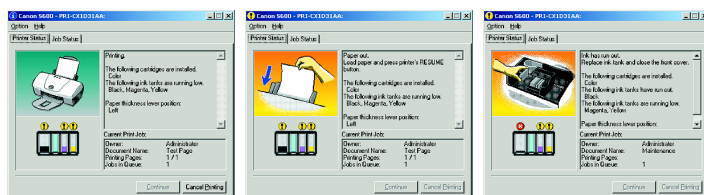

Additionally, the PRICOM C-6100U is compatible with the Canon Bubble Jet status monitor.* Our transparent network driver technology provides the user with all the printer information as if they were locally connected taking advantage of the printers bi-directional communication support. The PRICOM C-6100U, with intelligent technology, enables seamless, real-time monitoring of the status of all network printers.



C-6100U

C-6100U

TCP/IP


IPX peer to peer

Windows

10/100 Base



*The status monitor screen function is available only with Canon Bubble Jet printers. The screen design may vary depending on printer model and/or network operating system.

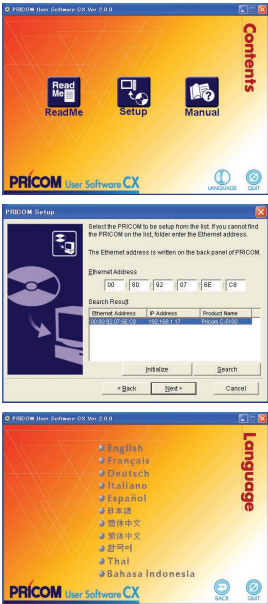

POINT AND CLICK SET-UP

The PRICOM C-6100U Print Server's intuitive on-screen Wizard walks users through configuration, step by step. It's as easy as point and click. The Wizard is available in 11 different languages so it's easily adaptable to different environments.

PRICOM-PRINT CLIENT SOFTWARE

PRICOM-Print Client Software is provided via CD-ROM. It enables direct, peer-to-peer printing in multiple operating systems including Windows 9x. This eliminates the need for an independent server to manage the printer network.

UPGRADE WITH THE TOUCH OF A BUTTON

The PRICOM C-6100U Print Server has built-in flash memory, so upgrading firmware is as easy as logging on to our web site and downloading the latest functionality. With access to the latest silix technology development, users protect their IT investment for the long term.

HIGH PERFORMANCE, OPTIMAL UTILIZATION

OPTIONAL FUNCTION

The PRICOM USB server is designed as a USB Master device. It takes the role of the PC in a USB environment. The silix designed system allows up to four printers when a USB hub is connected between the PRICOM USB server and the printers. The printers can be Canon devices or printers from any manufacturer with a USB interface. Connecting up to four printers maximizes the use of your investment by reducing the cost per network connection up to 75%.

WHY silix?

For over a decade, silix technology, a global leader in embedded network printing technology, has designed, manufactured and marketed leading-edge print servers designed to help businesses improve the way they move information.

For more information about how the PRICOM C-6100U Print Server can help your business, contact us at the sales office nearest you or visit one of our web sites.

TECHNICAL SPECIFICATIONS

Supported Canon Bubble Jet Printers	BJC-55, BJC-85, BJC-2100, BJC-2100SP, BJC-3000, BJC-6100, BJC-6200, BJC-6500, S100, S200, S300, S330, S400, S450, S500, S520, S530D, S600, S630, S750, S800, S820, S820D, S900, S4500, S6300, S9000 <i>Reference our web site for the latest compatible printer information.</i>	
Supported OS	Windows 9x, Me, NT 4.0, 2000, XP	
Supported protocols	TCP/IP IPX Peer to Peer	LPD, IPP ¹ , Raw socket #9100, FTP, HTTP, TELNET, DHCP, BOOTP, RARP silix technology original IPX protocol ²
Configuration	Quick Setup utility, Web Browser, TELNET	
Printer interface	USB 1.1 (A type)	
Network interface	10 Base-T / 100 Base-TX (Auto-detection)	
Language	Setup Utility (11) Manual (5)	English, French, German, Italian, Spanish, Japanese, Chinese, Taiwanese, Korean, Thai, Indonesian English, French, German, Japanese, Chinese
Warranty period	2 years	
Power supply	Universal AC Adapter (100-240V) for USA, Japan, Europe, UK, China	
Power consumption	5V 1A	
Regulatory approvals	FCC, CE, VCCI	
Package contents	PRICOM C-6100U print server, Quick Setup Guide poster, CD-ROM with configuration utility and PDF manual, AC-Adapter	
Dimension (WxDxH)	3.1 x 3.9 x 1.1 in / 80 x 100 x 28 mm	
Weight	3.2 oz / 90 g	

¹ IPP (Internet Printing Protocol Version 1.0)

² Does not support Novell NetWare.

