




How to Connect

This chapter explains how to connect this product and a printer to a network.

Preparation before installing this product	2
Connect this product to a USB device and a network	3

Preparation before installing this product

The following items are required in order to connect this product to a network.

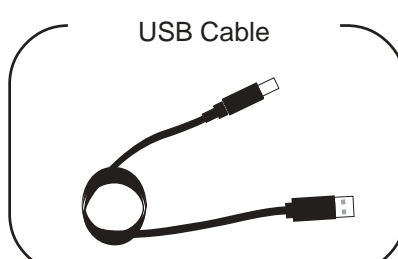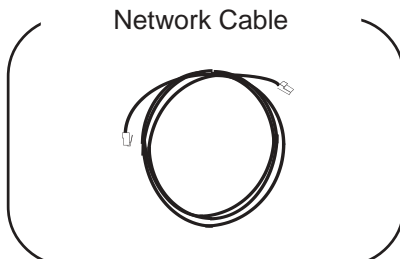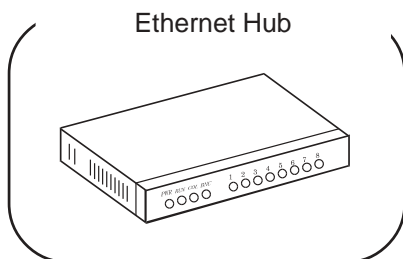

- When connecting this product to 100BASE-TX environment, please use 100Base-TX supported Ethernet hub and network cable (category 5 or above).

Connect this product to a USB device and a network



- Please be sure to read the operation manual of your USB device before you connect it to this product. The connecting method and position may vary depending on the USB device to be connected.
- Please use the AC adapter bundled with this product. Other AC adapters may cause unexpected damages.
- When unplugging this product or a printer, do not pull on the cord.
- If this product has been used in another network, reset it to the factory default settings before you start the configuration. (Please refer to **About this product - About the push switch - Factory default** in this manual for details.)
- This product supports Canon printers.

1. Connect the network cable from an Ethernet HUB to this product(1).
2. Connect this product and the printer with a USB cable(2).
3. Connect the AC adapter to this product (3), and then insert the AC plug into the electric outlet (4). Check that the LINK LED(Green) light is on (5).
4. Turn on the printer(6).



- The shape of connector of the USB cable type **A** and that of type **B** are different from each other. Check it with care.

Note

